




### **OWNER MANUAL**


MOUNTAIN TOP® EVOe ROLL COVER


### 1 WARNINGS

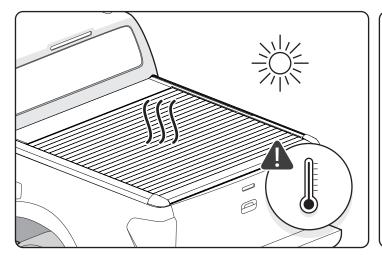


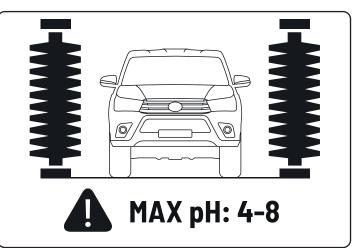

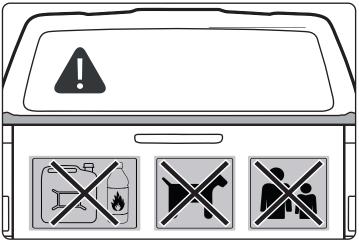

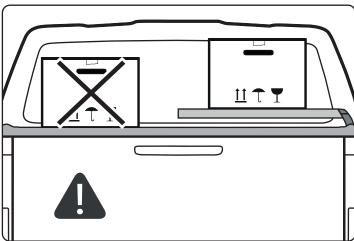

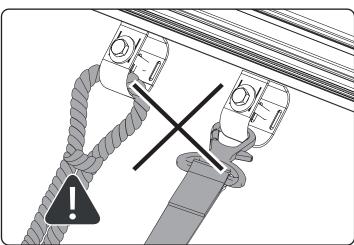


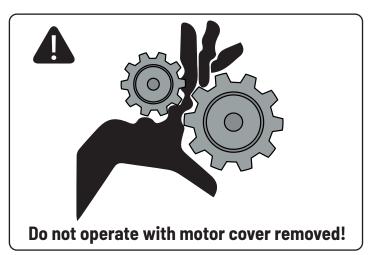

- Temperatures can be very high under the cover when closed.
- We do not recommend washing the EVOe roll cover in a brushless carwash, as the coating may be damaged due to use of chemicals.


880 903 / Issue 01 03/23

### 2 CONDITIONS OF USE

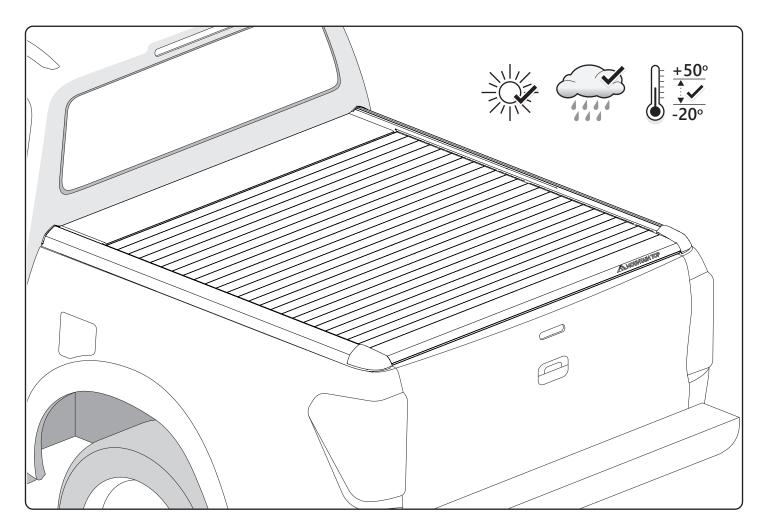


- The EVOe roll cover design is lightweight and not suitable for extreme usage.
- Designed to withstand rain water, some water ingress may occur.
- Dust can enter the compartment through various gaps.
- Due to profiles which relatively quick heats up and cools down according to weather conditions can cause condensation on the inside.
- The EVOe roll cover is not designed for loading although it can support normal snow loads.
- Goods in the bed must be secured during transportation to prevent damage.


# 3 OPERATION EVOe

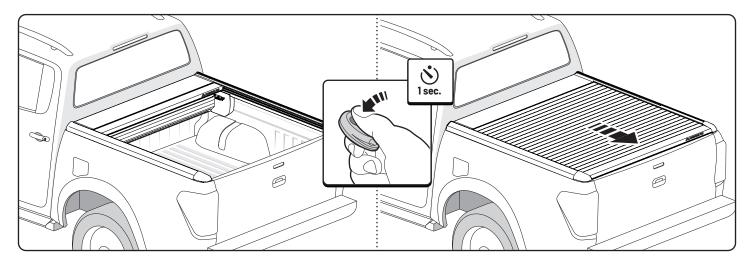

#### Close

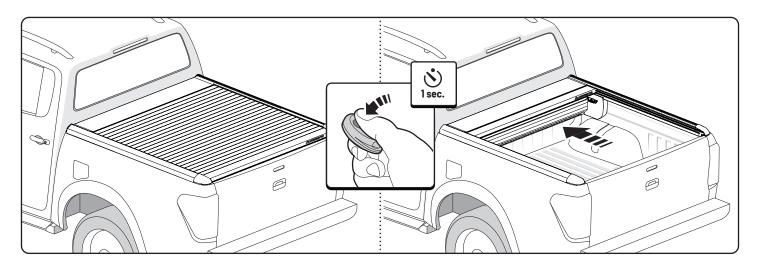


#### Open

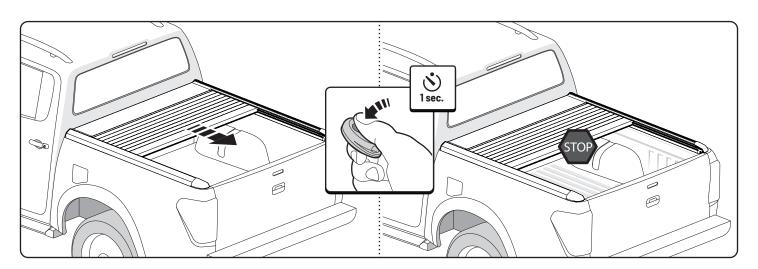


### Stop


880 903 / Issue 01 05/23

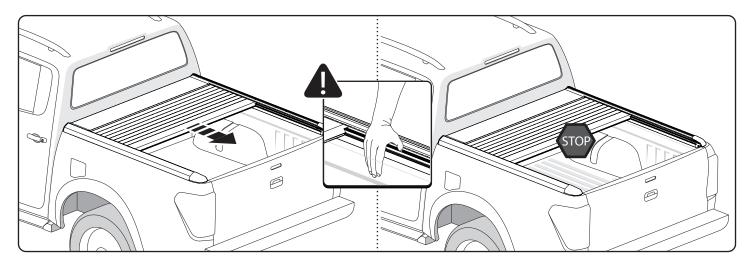


### Obstruction stop

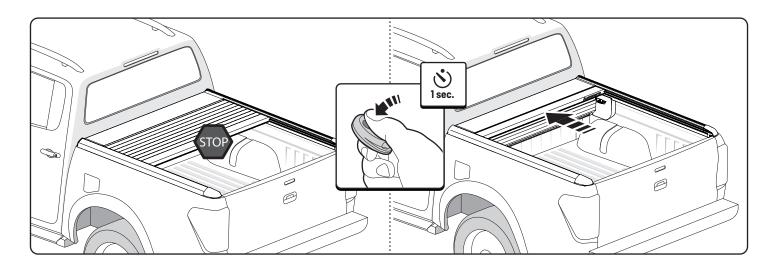


### After stop

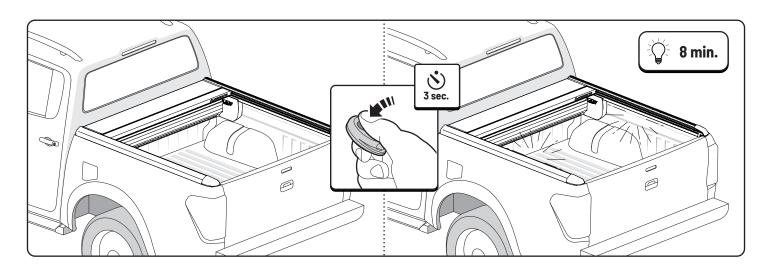


### • Light on

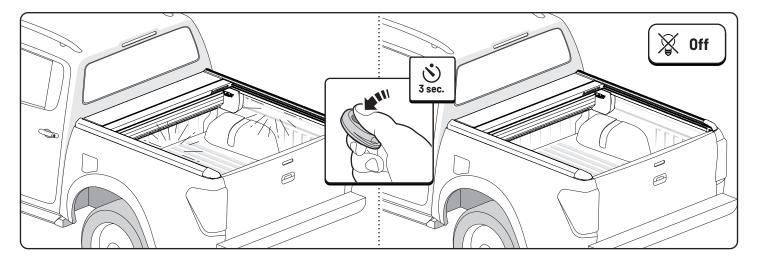

Light off

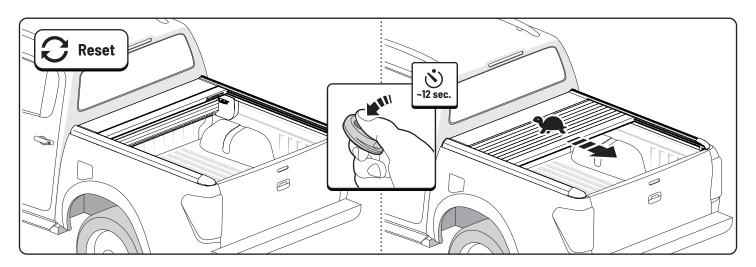


Auto calibration

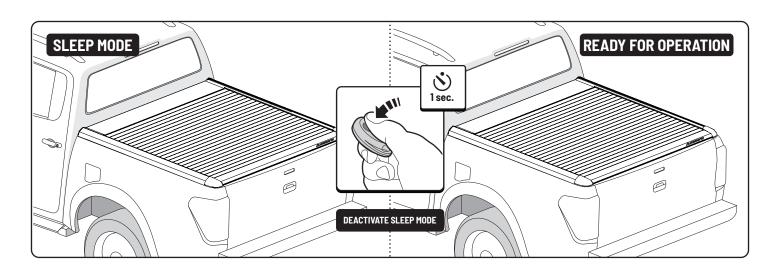


• Auto sleep mode = 48 Hrs.


880 903 / Issue 01 07/23

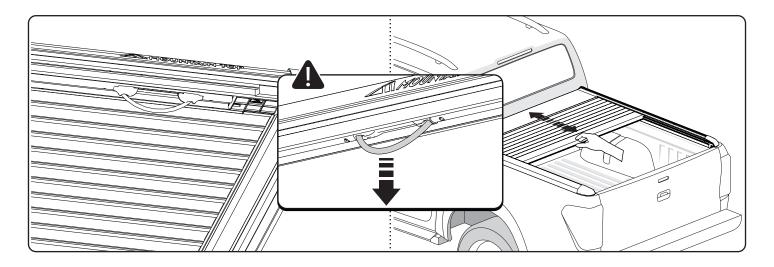


• Release - manual operating.

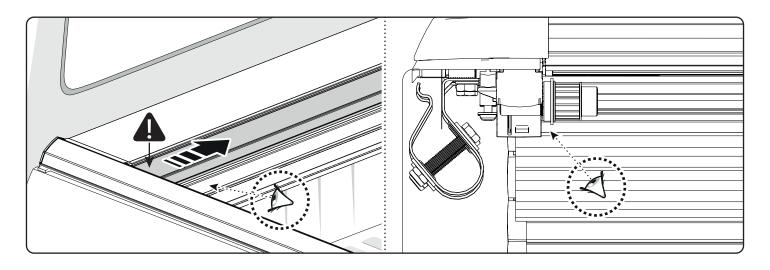

Reconnect after manual operation.

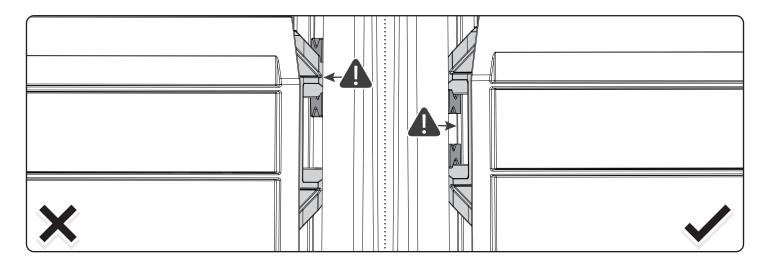


• Reconnect after manual operation.

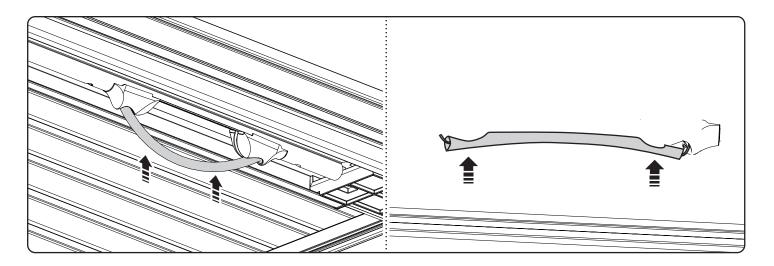


• Secure cargo inside bed.


880 903 / Issue 01 09/23

# 4 MAINTENANCE

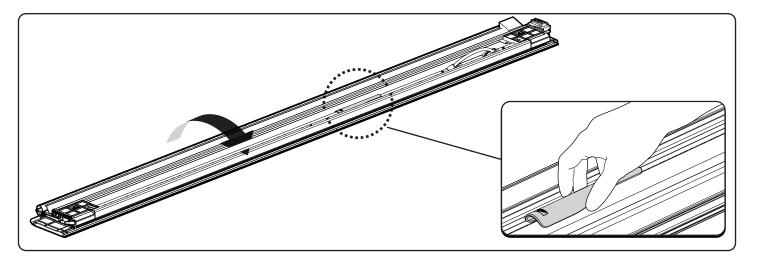


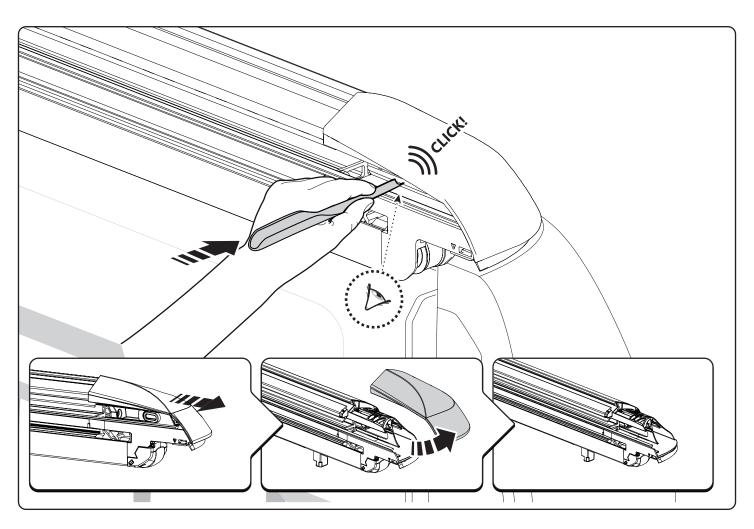


• Use the multi tool to remove the plastic covers on the side profiles.

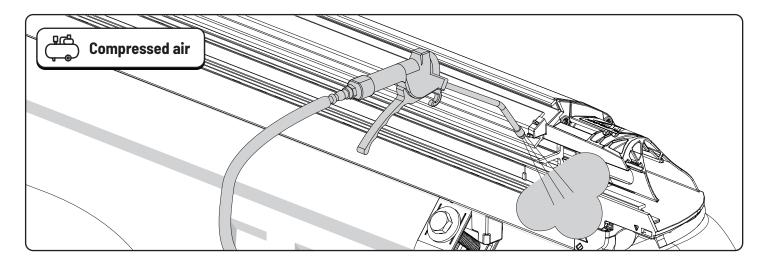

Remove dirt and debris using compressed air.

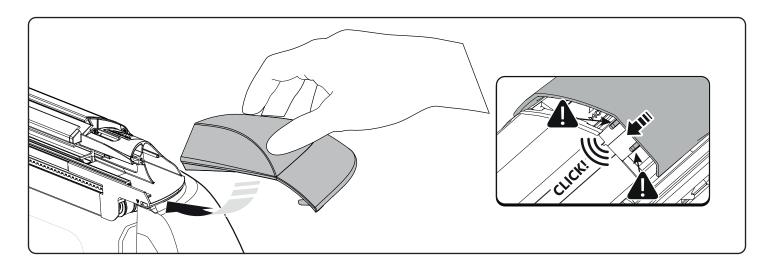


Mount plastic covers.

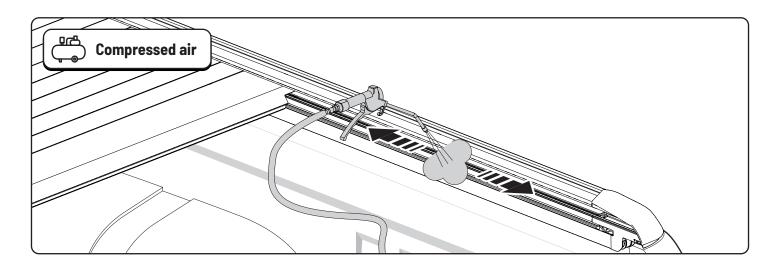


Clean the side profiles.


880 903 / Issue 01 11/23

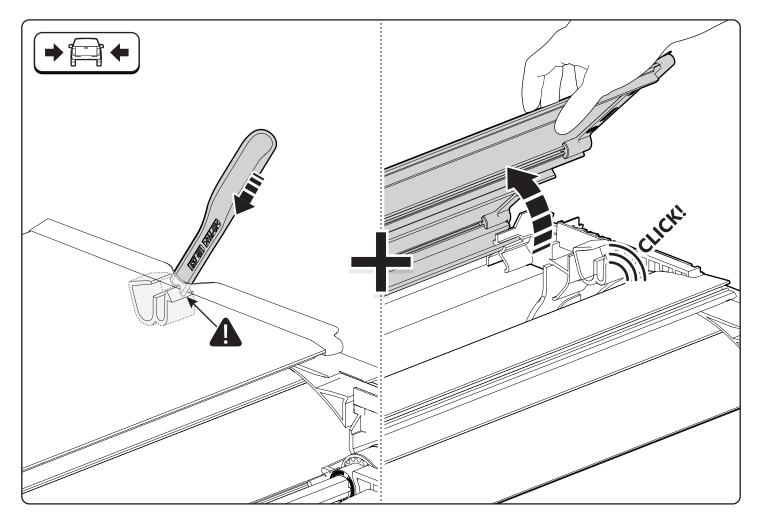

• Open the canister.

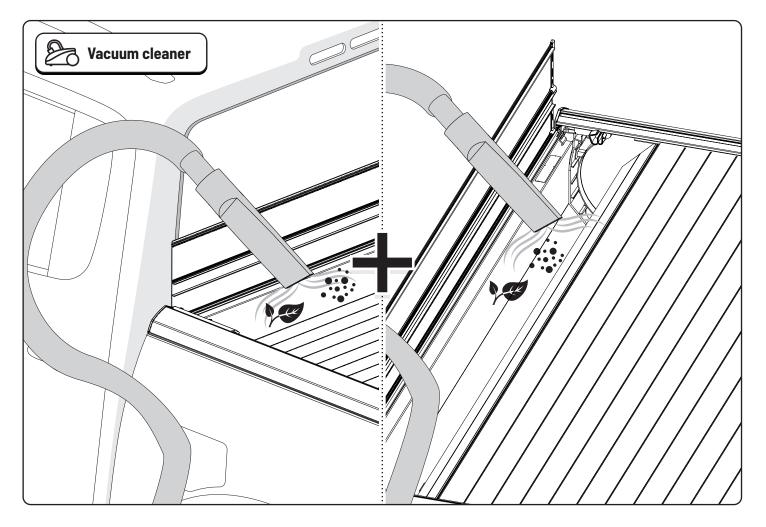


• Clean the canister.

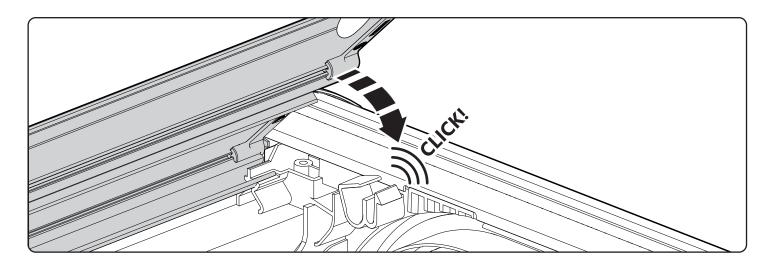


Close the canister.


880 903 / Issue 01 13/23

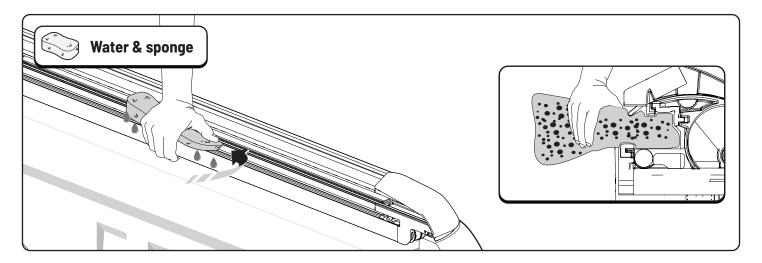

• Clean the drainage channels on the side profiles. Do not use high pressure cleaner.

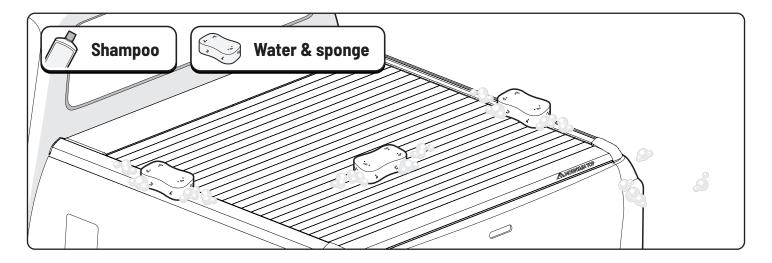


The EVOe roll cover should be cleaned regularly.

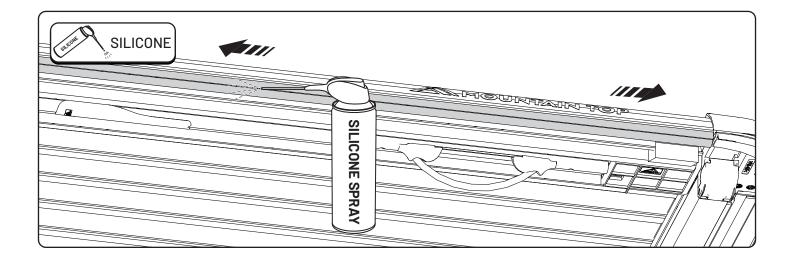




# 6 CHECK MEASUREMENTS MAINTENANCE

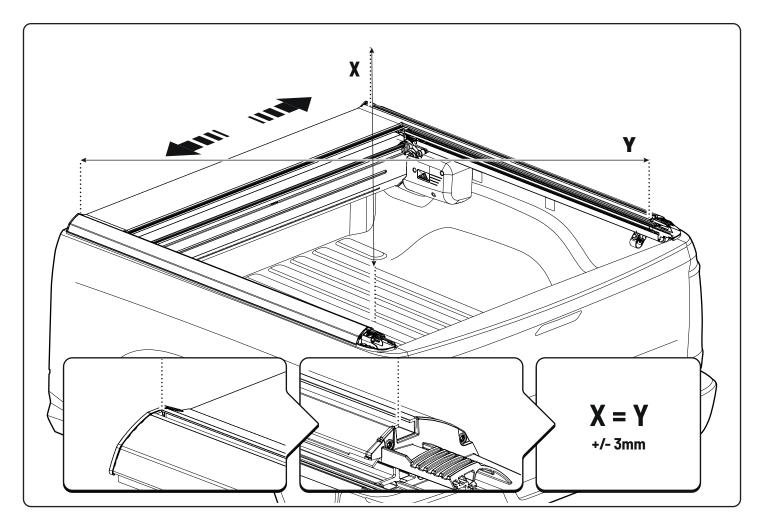


• Ensure the cross measurements are identical.

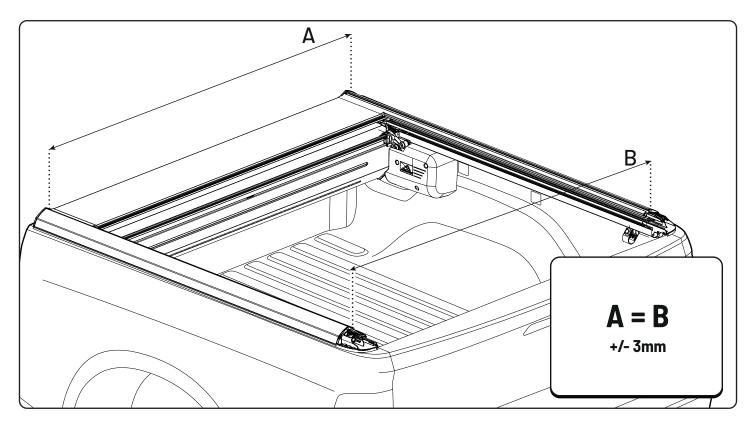


880 903 / Issue 01 15/23


## 6 CLAMPS

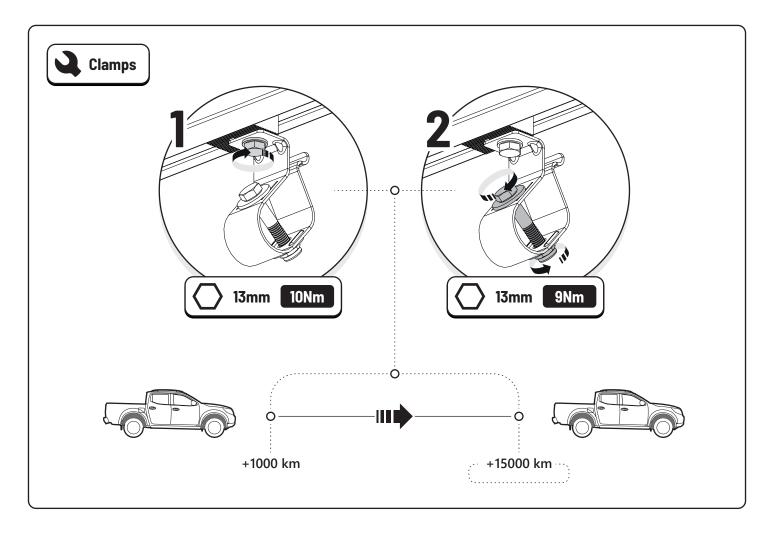



• Re-tighten the clamps after the first 1000 km. And then every 15.000 km


# 7 REPLACE PARTS

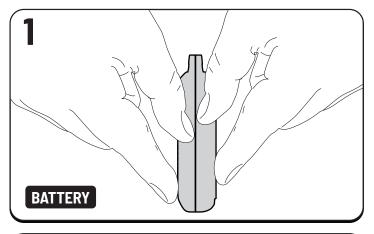


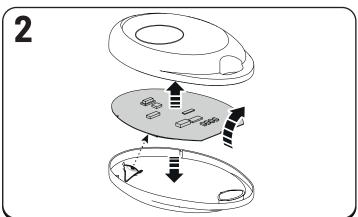

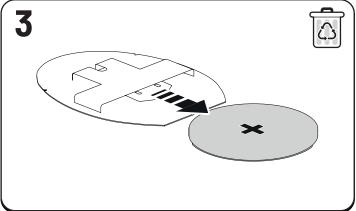


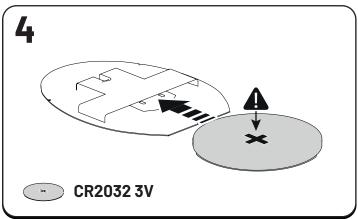


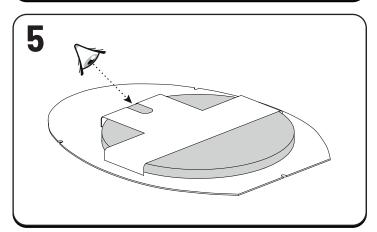


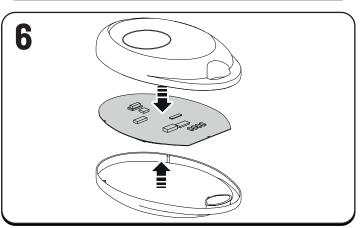


880 903 / Issue 01 17/23

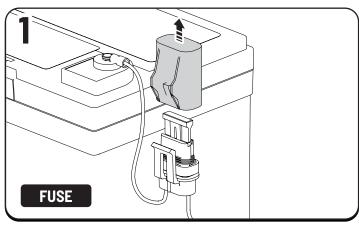


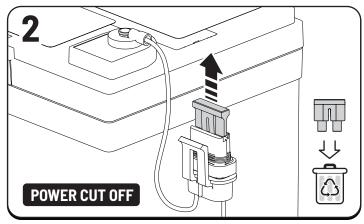

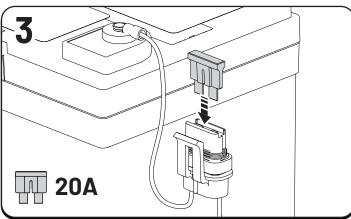

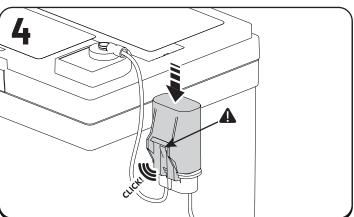


Recommended part change	Km	Years
Glide rails	50.000	2
Side profiles	100.000	3
Rear profiles	200.000	5

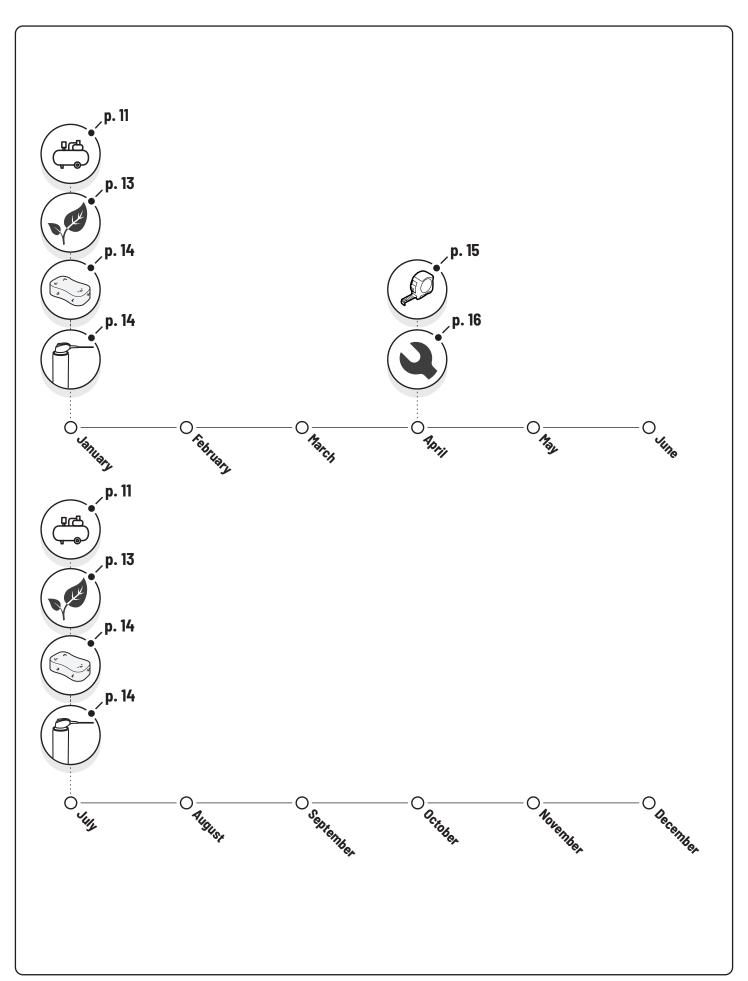

880 903 / Issue 01 19/23

Maintenance EVOe manager	0.0.0	
Type of Maintenance	Date	Done by

### **ACCESSORIES**

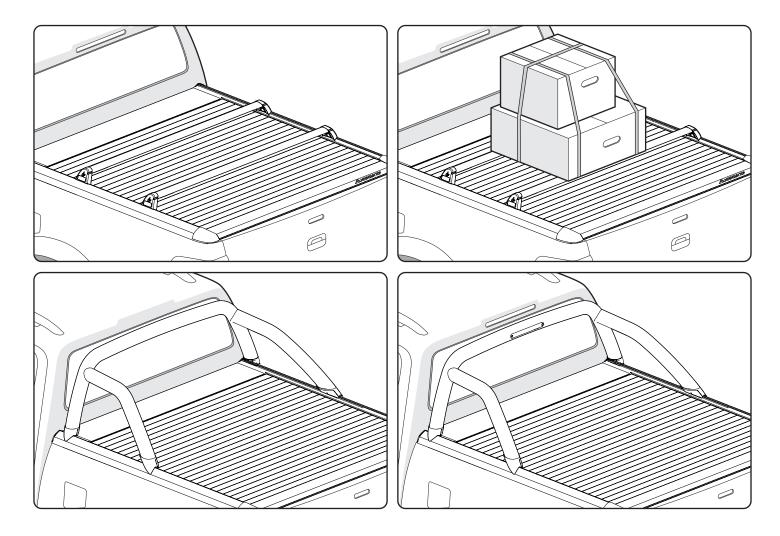

- Mountain Top Cargo Carrier combined load capacity of 75 Kg.
- Mountain Top Sports Bar available in 2 versions; with and without brakelight.
- See more accessories and spareparts www.mountaintop.dk.

880 903 / Issue 01 21/23

880 903 / Issue 01 23/23



Customer Service	+45 4810 2950 (08:00 - 16:00 CET)
Support	info@mountaintop.dk
Website	www.mountaintop.dk
Address	Pedersholmparken 10, 3600 Frederikssund, Denmark



Scan for more information