


OWNER'S MANUALRealTruck® EVOm Roll Cover




1 WARNINGS

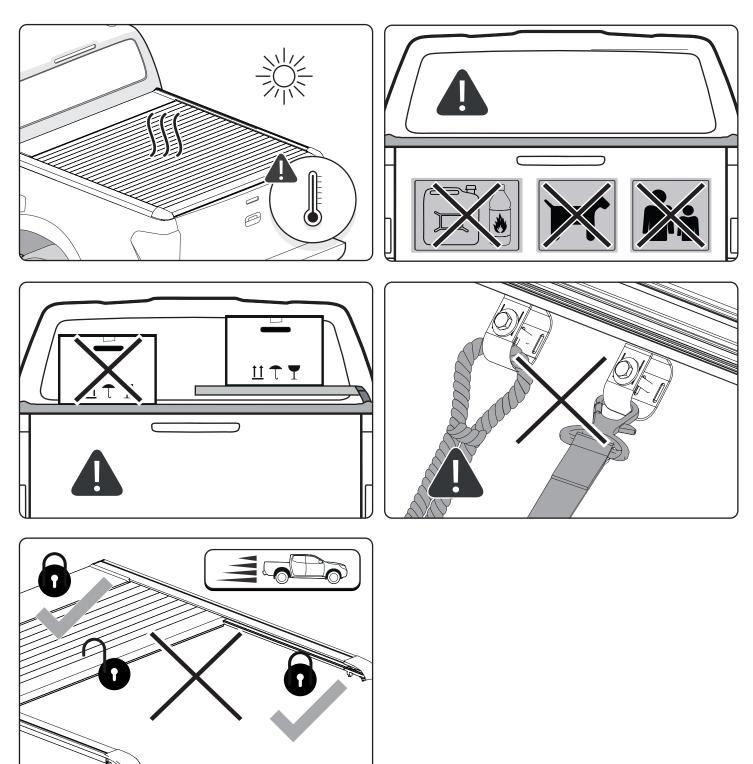

- Temperatures can be very high under the cover when closed.
- We do not recommend washing the EVOm roll cover in a brushless carwash, as the coating may be damaged due to use of chemicals.


2 CONDITIONS OF USE

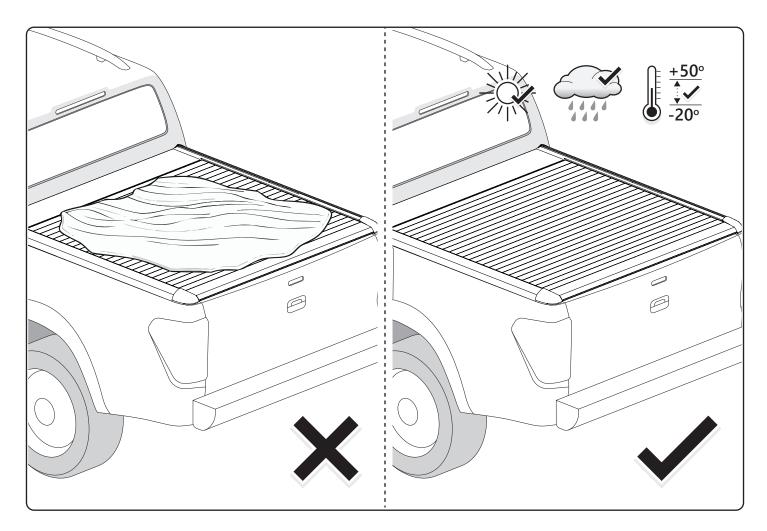


- The Mountain Top EVOm roll cover design is lightweight and not suitable for extreme usage.
- Designed to withstand rain water, some water ingress may occur.
- Dust can enter the compartment through various gaps.
- Due to profiles which relatively quick heats up and cools down according to weath conditions can cause condensation on the inside.
- The EVOm roll cover is not designed for loading although it can support normal snow loads.
- Goods in the bed must be secured during transportation to prevent damage.
- Leave truck in a warm environment for 10-15 minutes to defrost or clear out frozen locking mechanisms from ice in case of freezing weather conditions.
- The EVOm roll cover area must be clear of heavy dirt, snow or ice in able to operate.


880 901 / Issue 08 03/19

OPERATION EVOm

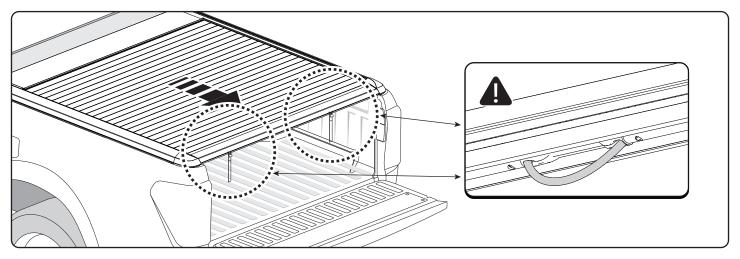

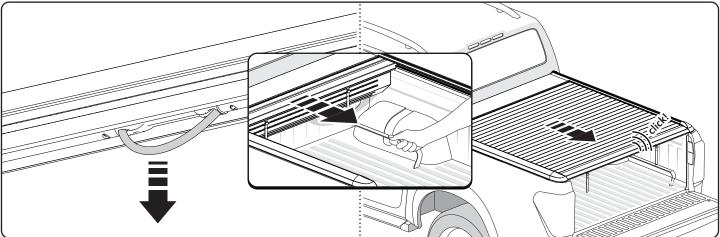



Close

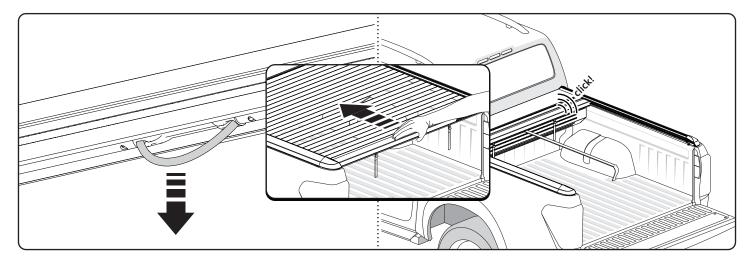

- Open
- When the EVOm roll cover is fully opened, a lock activator is automatically triggered, engaging the locking system.
- For the EVOm roll cover to close correctly, the locking system must be engaged before the cover is closed.


4 MAINTENANCE

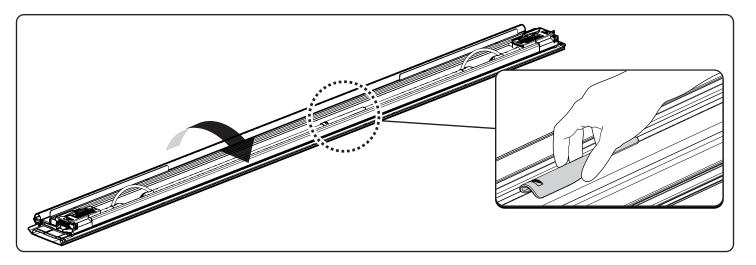

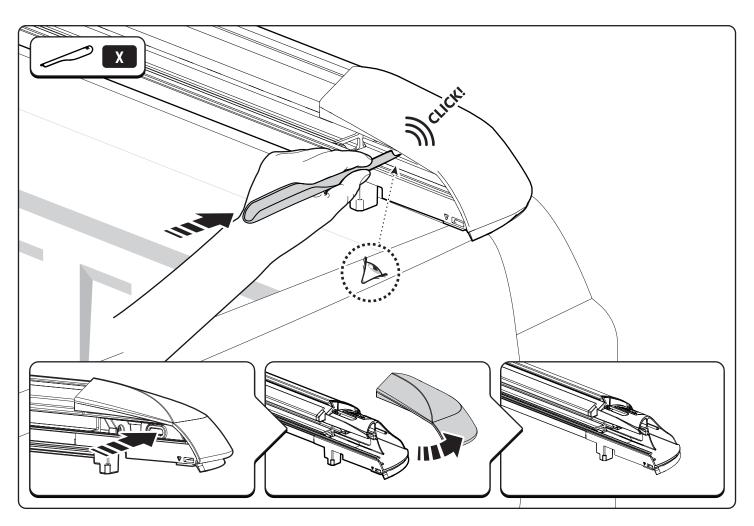


• Use the multi tool to remove the plastic covers on the side profiles.


880 901 / Issue 08 05/19

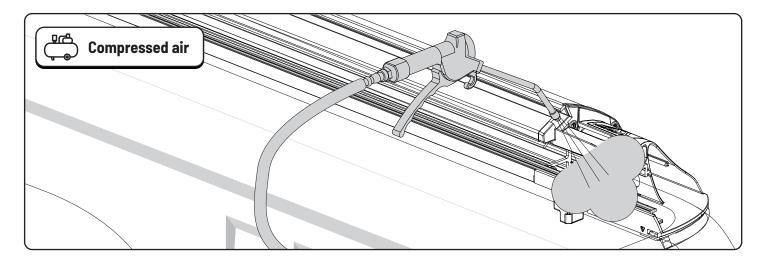


Remove dirt and debris using compressed air.

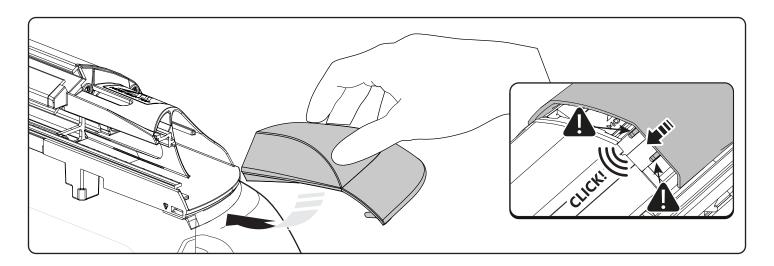


Mount plastic covers.

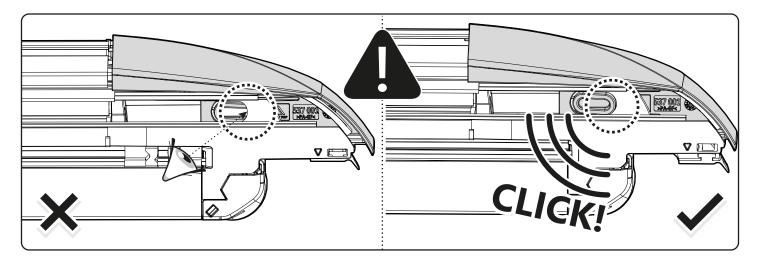

Make sure plastic cover is mounted correctly.

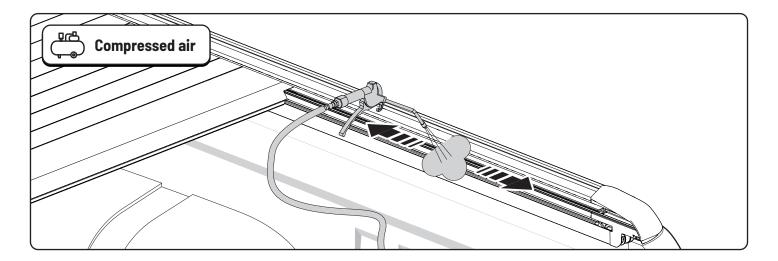


• Clean the side profiles.

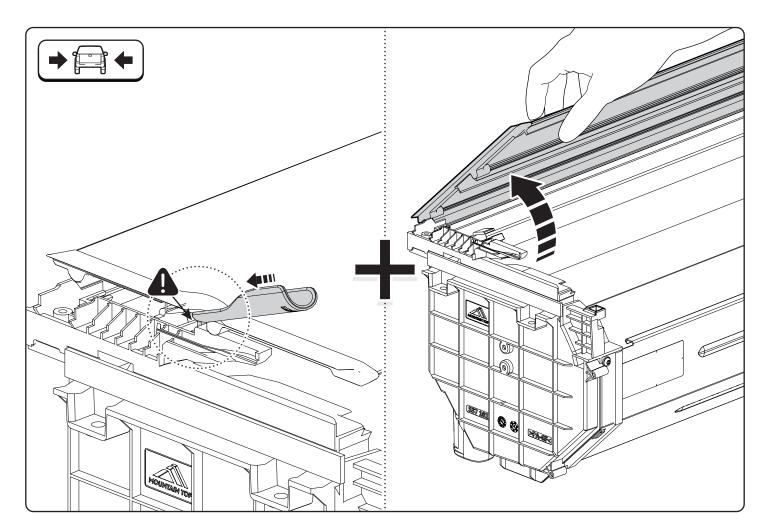


• Open the canister.


880 901 / Issue 08 07/19

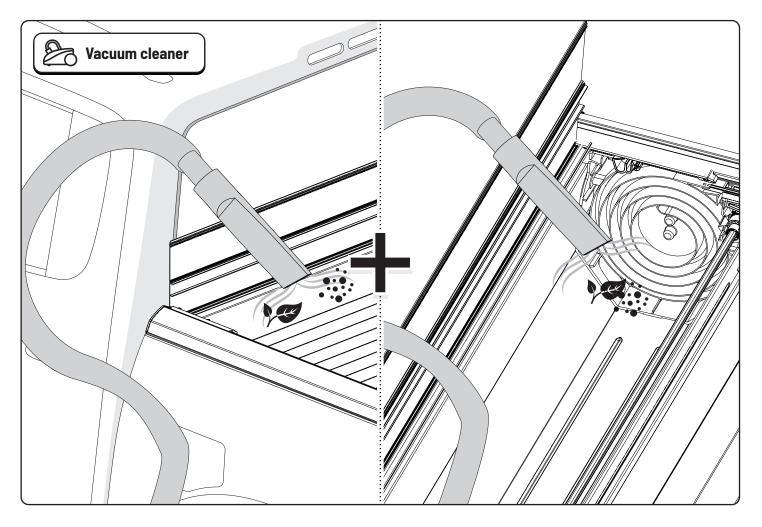


• Clean the canister.

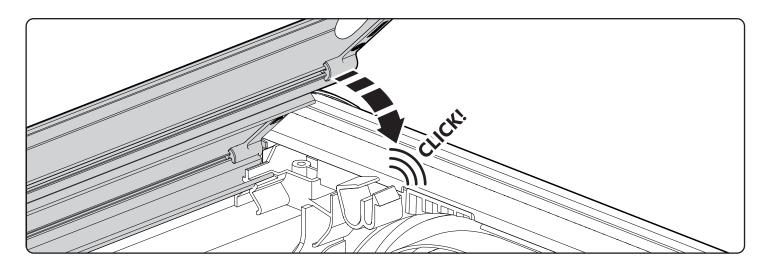

• Close the canister.

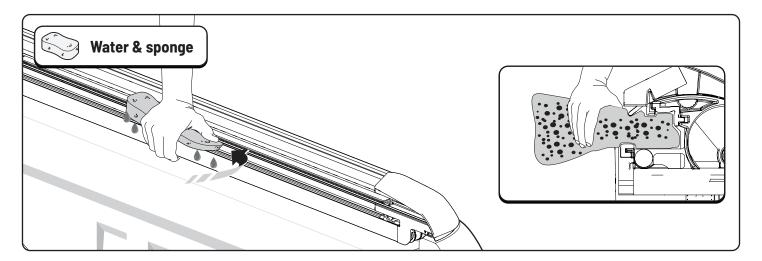


• Clean the drainage channels on the side profiles.

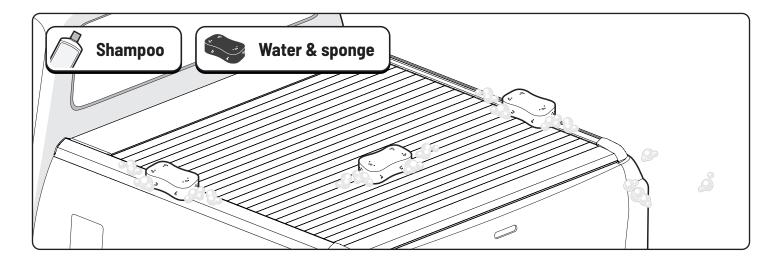


• The EVO roll cover should be cleaned regularly.


880 901 / Issue 08 09/19

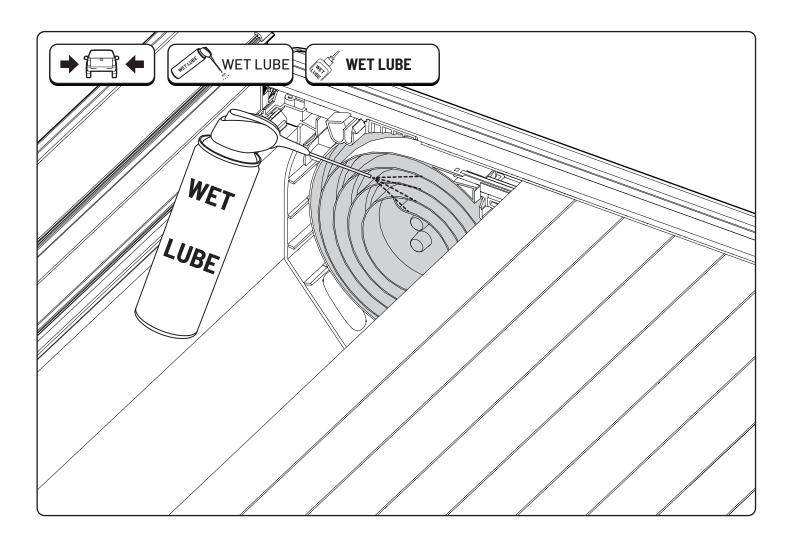

• Regularly, and following cleaning, apply a PTFE-free all-conditions wet lube product to the inside of the canister ends.

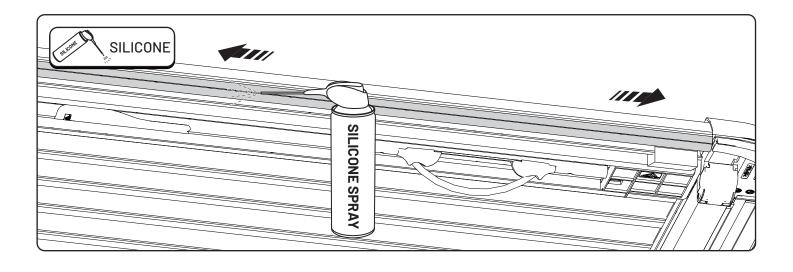


5 CHECK GLIDE RAILS MAINTENANCE

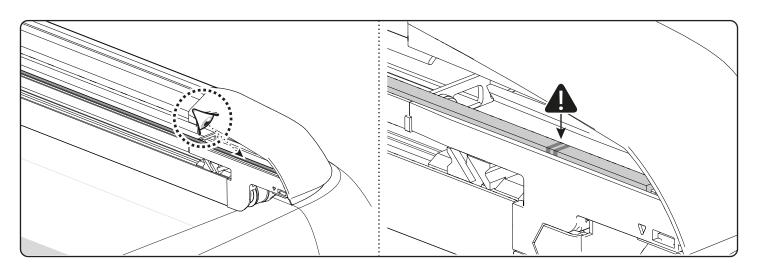


 If abnormal sounds occur during operation of the roll cover, inspect the glide rails for debris or damage. If the glide rails are damaged or worn, then replacement glide rails are needed.

880 901 / Issue 08 11/19

6 CHECK MEASUREMENTS MAINTENANCE

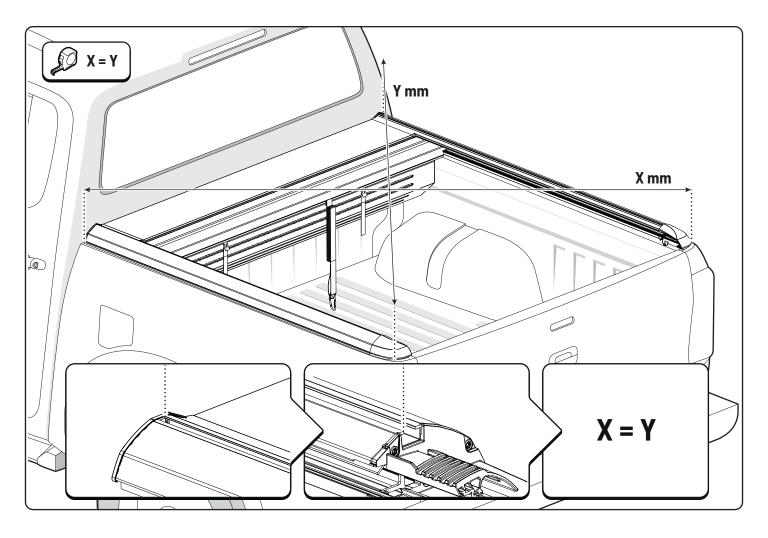


• Ensure the cross measurements are identical.

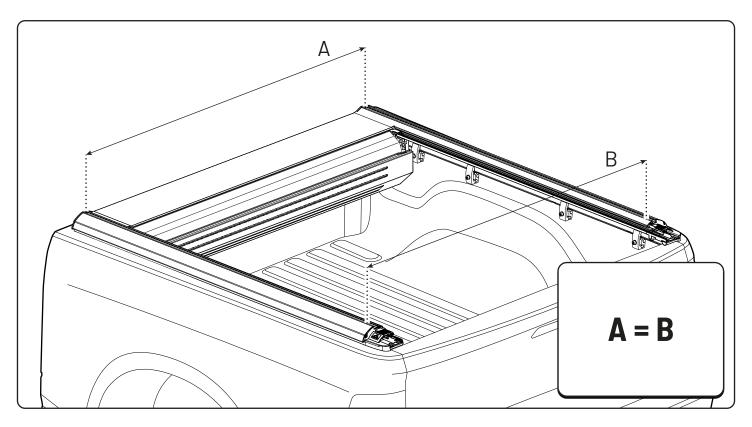

12/19

7 CLAMPS

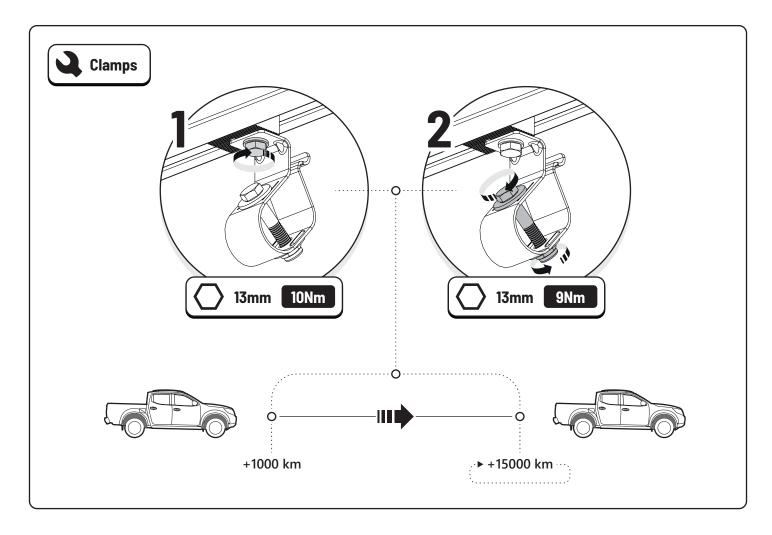


• Re-tighten the clamps after the first 1000 km. And then every 15.000 km

880 901 / Issue 08 13/19

8

MINIMUM MAINTENANCE REQUIREMENTS

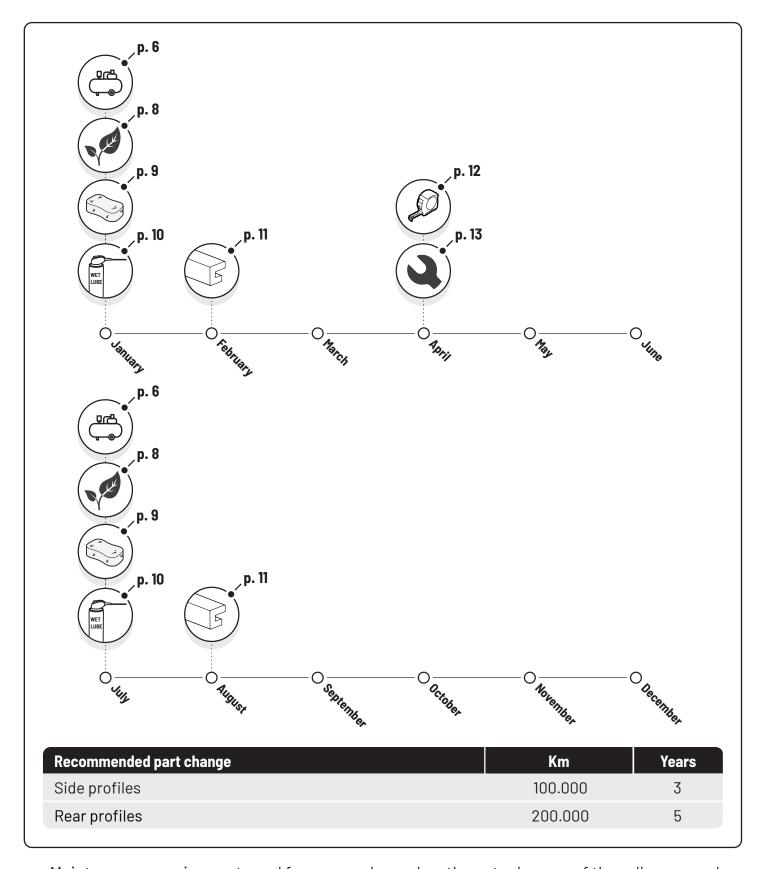

- Maintenance requirements and frequency depend on the actual usage of the roll cover and the environments and elements that it is exposed to.
- Clean and lubricate the cover accordingly to ensure the best possible operation and function.

Maintenance EV0m manager






Type of Maintenance	Date	Done by

880 901 / Issue 08 15/19

ACCESSORIES

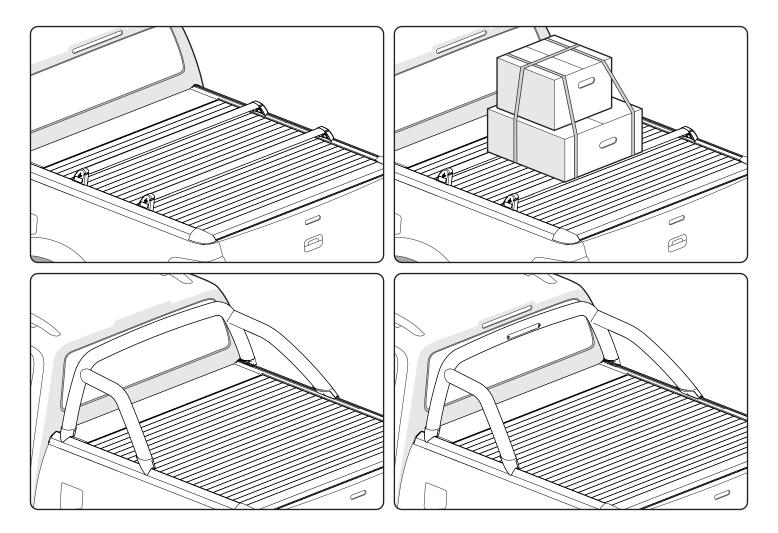

- Mountain Top Cargo Carrier combined load capacity of 75 Kg.
- Mountain Top Sports Bar available in 2 versions; with and without brakelight.
- See more accessories www.realtruck.dk.

880 901 / Issue 08 17/19

880 901 / Issue 08 19/19



Customer Servic	e +45 4810 2950 (08:00 - 16:00 CET)
Support	info@realtruck.dk
Website	www.realtruck.dk
Address	Pedersholmparken 10, 3600 Frederikssund, Denmark